


1. DIMENSION OUTLINE

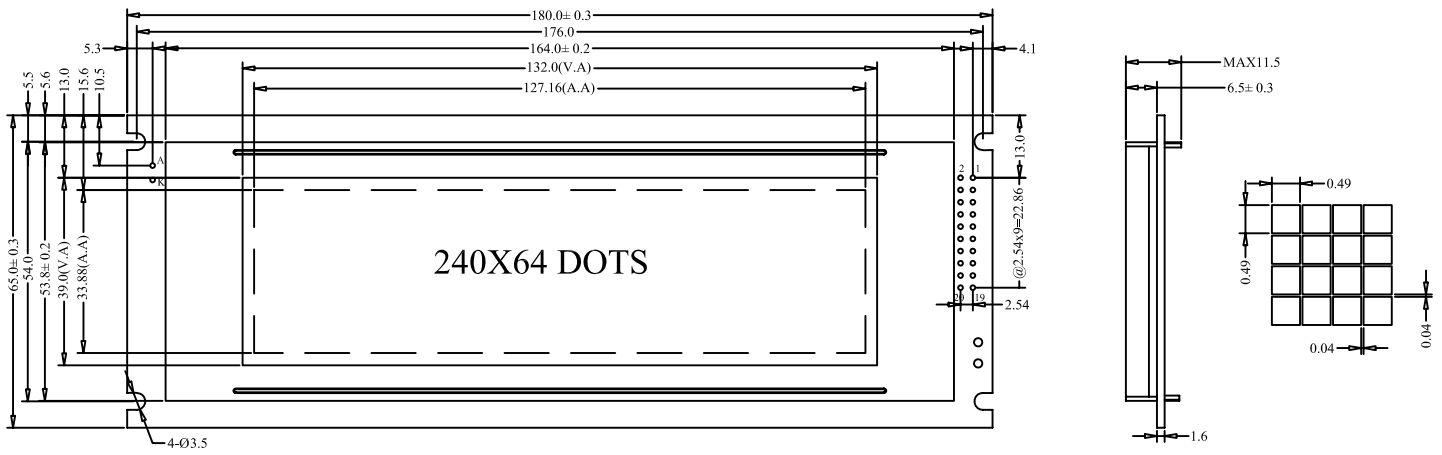


2. MECHANICAL SPECIFICATIONS

ITEM	SPECIFICATIONS	ITEM	REMARK
Module Size(L×W×H)	180.0×65.0×14.5	mm	Reference Dimensional Outline
View Area(W×H)	132.0×39.0	mm	
Effective V/Area	127.16×33.88	mm	
Number of Characters	240×64	-	
Dot Pitch(W×H)	0.53×0.53	mm	
Dot Size(W×H)	0.49×0.49	mm	
Weight (Reflective/Led)	-	g	

3. ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	CONDITION	STANDARD	
			MIN	MAX
Logic Voltage	V _{DD}	Ta=25°C	-0.3V	7V
LCD Voltage	V _{LCD}		-0.3V	25V
Input Voltage	V _I		-0.3V	V _{DD} +0.3V
Operation Temperature	T _{OP}	—	-20°C	70°C
Storage Temperature	T _{ST}	—	-30°C	90°C

4. BLOCK DIAGRAM MECHANICAL

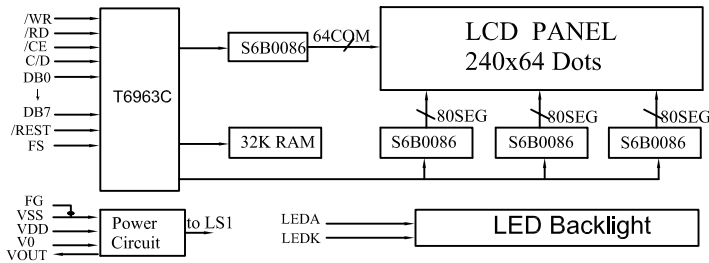

5. LED BACKLIGHT SPECIFICATIONS

ITEM	SYMBOL	TYPE	MAX	UNIT
Ta=25°C				
Forward Voltage	V _f	4.1	4.2	V
Forward Current	I _f	660	—	mA
Emission Wave Length	λ _p	568	—	nm

6. INTERFACE PIN CONNECTIONS

ITEM	SYMBOL	LEVEL	FUNCTIONS
1	FG	—	Frame Ground
2	VSS	0V	Power Ground
3	VDD	+5V	Power supply for logic
4	V0	—	Contrast adjust
5	/WR	L	Write signal
6	/RD	L	Read signal
7	CS	H/L	Chip selection
8	RS	H/L	H:command L:data
9	NC	—	No connection
10	/REST	L	Reset signal
11-18	DB0-DB7	H/L	Data Bus
19	FS	H/L	Font selection L:8x8 H:6x8
20	VOUT	—	Output voltage for LCD driving
21	LEDA	+5V	Power supply for LED Backlight
22	LEDK	0V	

7. ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	MIN	TYPE	MAX	UNIT
Ta=25°C					
Logic Power	V _{DD}	4.5	5	5.5	V
Input High Voltage	V _{IH}	V _{DD} -2.2	—	V _{DD}	V
Input Low Voltage	V _{IL}	0	—	0.8	V
Output High Voltage	V _{OH}	V _{DD} -0.3	—	V _{DD}	V
Output Low Voltage	V _{OL}	0	—	0.3	V
Logic Current	I _{DD}	—	—	20	mA
Operation Voltage For LCD	V _{DD} -V ₀	—	12	—	V