


1. DIMENSION OUTLINE

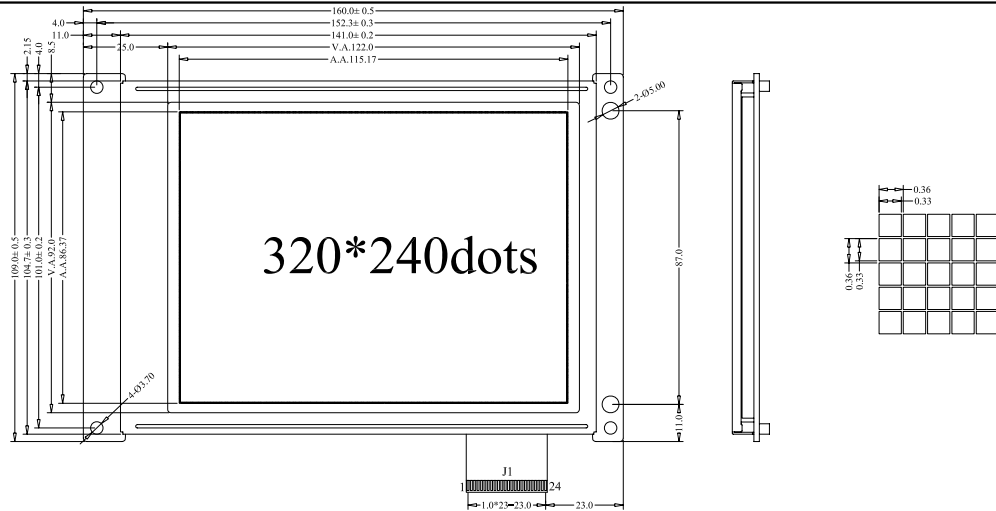


2. MECHANICAL SPECIFICATIONS

ITEM	SPECIFICATIONS	ITEM	REMARK
Module Size(L×W×H)	160.0×109.0×11.0	mm	Reference Dimensional Outline
View Area(W×H)	122.0×92.0	mm	
Effective V/Area	115.17×86.37	mm	
Number of Characters	320×240	-	
Dot Pitch(W×H)	0.36×0.36	mm	
Dot Size(W×H)	0.33×0.33	mm	

3. ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	CONDITION	STANDARD	
			MIN	MAX
Logic Voltage	V _{DD}	Ta=25°C	-0.3V	7V
LCD Voltage	V _{LCD}		-0.3V	25V
Input Voltage	V _I	—	-0.3V	V _{DD} +0.3V
Operation Temperature	T _{OP}	—	-20°C	70°C
Storage Temperature	T _{St}	—	-30°C	80°C

4. BLOCK DIAGRAM MECHANICAL

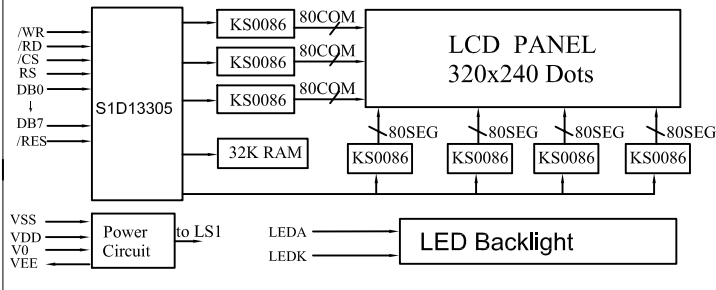

5. LED BACKLIGHT SPECIFICATIONS

ITEM	SYMBOL	TYPE	MAX	UNIT
Ta=25°C				
Forward Voltage	V _f	3.0	3.1	V
Forward Current	I _f	150	—	mA
Emission Vave Length	λ _P	White	—	nm

6. INTERFACE PIN CONNECTIONS

ITEM	SYMBOL	LEVEL	FUNCTIONS
1	/REST	L	Reset signal
2	/RD	L	Read signal
3	/WR	L	Write signal
4	/CS	L	Chip enable signal
5	RS	H/L	H:command L:data
6-13	DB0-DB7	H/L	Data Bus
14	VDD	+5V	Power supply for logic
15	VSS	0V	Power Ground
16	VEE	—	Output voltage for lcd driving
17	V0	—	Contrast adjust
18	T-SK	H/L	Data Clock Signal (MK715)
19	T-DO	H/L	Data Output (MK715)
20	T-DI	H/L	Data input (MK715)
21	T_CS	H/L	Touch Panel Select (MK715)
22	T-INT	H/L	Interrupt Signal (MK715)
23	LEDA	+5V	Backlight Anode
24	LEDK	0V	Backlight Cathode

7. ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	MIN	TYPE	MAX	UNIT
Ta=25°C					
Logic Power	V _{DD}	4.5	5	5.5	V
Input High Voltage	V _{IH}	V _{DD} -2.2	—	V _{DD}	V
Input Low Voltage	V _{IL}	0	—	0.8	V
Output High Voltage	V _{OH}	V _{DD} -0.3	—	V _{DD}	V
Output Low Voltage	V _{OL}	0	—	0.3	V
Logic Current	I _{DD}	—	—	170	mA
Operation Voltage For LCD	V _{DD} -V ₀	—	23	—	V