


HS162-2 (16 characters x 2)

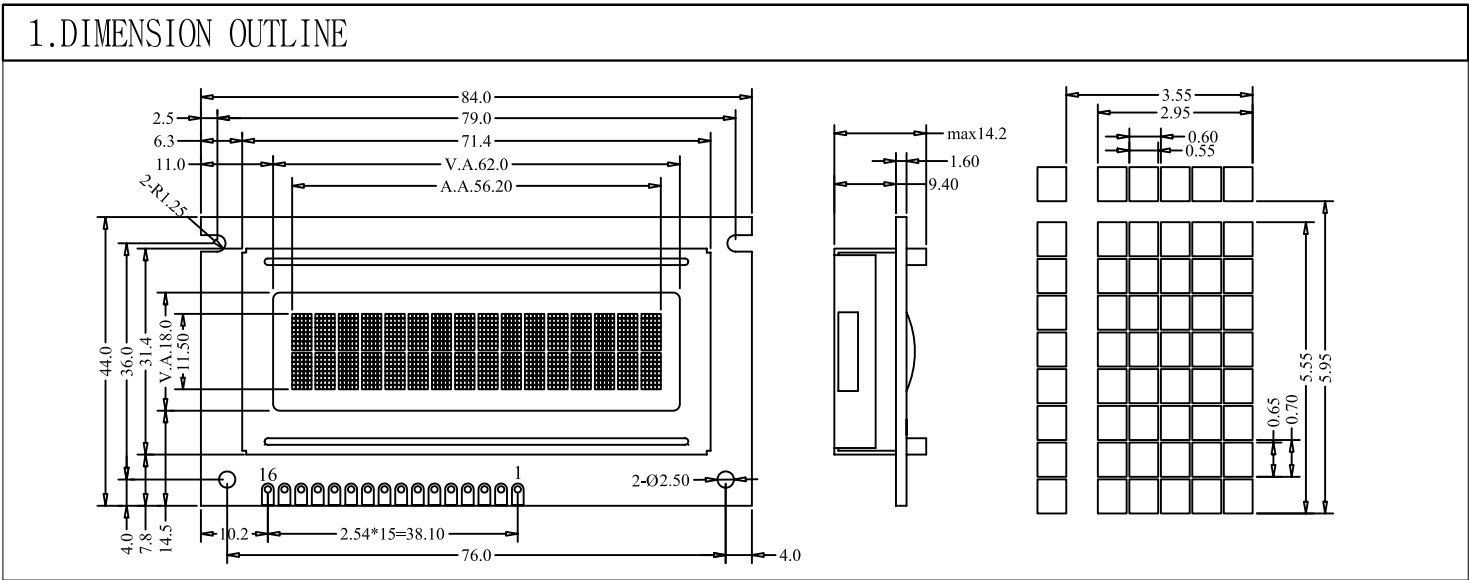


2.MECHANICAL SPECIFICATIONS

ITEM	SPECIFICATIONS	ITEM	REMARK
Module Size(L×W×H)	84.0×44.0×14.2	mm	Reference Dimensional Outline
View Area(W×H)	62.0×18.0	mm	
Effective V/Area	56.20×11.50	mm	
Number of Characters	16CH×2Lines	-	
Character Size(W×H)	2.95×5.55	mm	
Dot Size(W×H)	0.55×0.65	mm	
Weight(Reflective/Led)	-	g	

3.ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	CONDITION	STANDARD	
			MIN	MAX
Logic Voltage	V _{DD}	Ta=25℃	-0.3V	7V
LCD Voltage	V _{LCD}		-0.3V	13V
Input Voltage	V _I		-0.3V	V _{DD} +0.3V
Operation Temperature	T _{OP}	—	-20℃	70℃
Storage Temperature	T _{ST}	—	-30℃	80℃

4.BLOCK DIAGRAMMECHANICAL

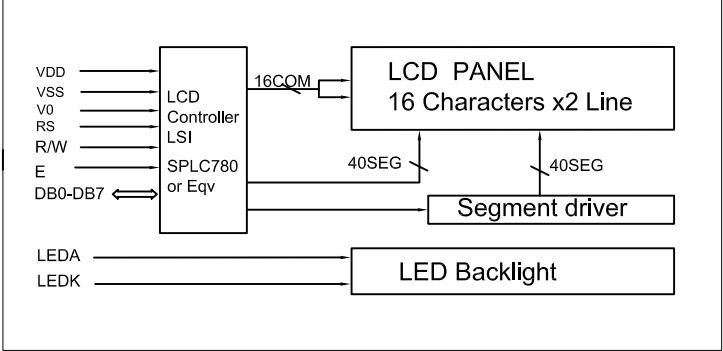

5.LED BACKLIGHT SPECIFICATIONS

ITEM	SYMBOL	TYPE	MAX	UNIT
Ta=25℃				
Forward Voltage	V _f	4.1	4.3	V
Forward Current	I _f	240	—	mA
Emission Vave Length	λ _P	568	—	nm

6.INTERFACE PIN CONNECTIONS

ITEM	SYMBOL	LEVEL	FUNCTIONS
1	LEDA	+5V	Power supply For LED Backlight
2	LEDK	0V	
3	VSS	0V	Power Ground
4	VDD	+5V	Power Supply For Logic
5	V0	—	Contrast adjust
6	RS	H/L	H:data L:command
7	R/W	H/L	H:read L:write
8	E	H. H→L	Enable signal
9-16	DB0-DB7	H/L	Data Bus

7.ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	MIN	TYPE	MAX	UNIT
Ta=25℃					
Logic Power	V _{DD}	4.5	5	5.5	V
Input High Voltage	V _{IH}	2.2	—	V _{DD}	V
Input Low Voltage	V _{IL}	-0.3	—	0.8	V
Output High Voltage	V _{OH}	2.4	—	V _{DD}	V
Output Low Voltage	V _{OL}	0	—	0.4	V
Logic Current	I _{DD}	—	1.2	3.0	mA
Operation Voltage For LCD	V _{DD} -V _O	—	5.0	—	V